


# F2 Cylinder with spherical composite bearing adjustable

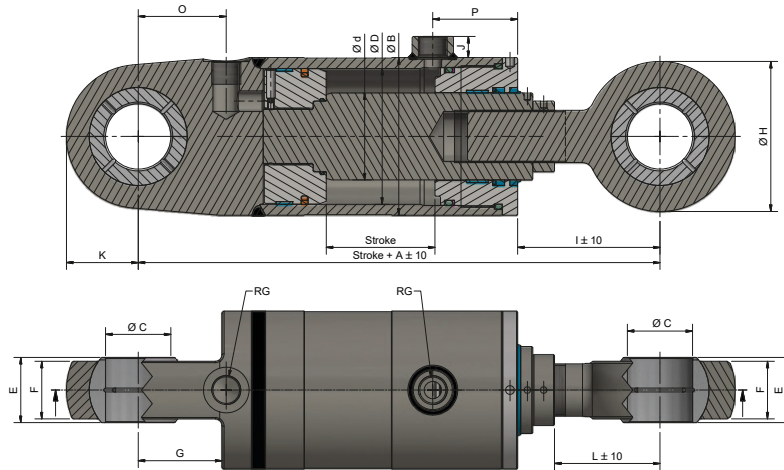

Dimension			INDEX												
D	d	B	A	C	E	F	G	H	I	J	K	L	O	P	RG
32	20	42	183	16	16	14	25	45	50	13,5	21	33	34	45	1/4"
40	25	50	197	20	20	18	27	50	60	13,5	25	40	36	42	3/8"
50	30	60	216	25	26	24	35	60	69	13,5	30	46	41	45	3/8"
50	35	60	216	25	26	24	35	60	69	13,5	30	46	41	45	3/8"
63	40	73	245	32	26	24	35	73	82	16,5	36,5	57	42	53	1/2"
80	50	92	270	40	32	30	50	92	91	16,5	46	62	54	59	1/2"
80	60	92	270	40	32	30	50	92	91	16,5	46	62	54	59	1/2"
100	63	115	340	50	50	45	70	108	119	16,5	54	85	78	72	1/2"
100	80	115	340	50	50	45	70	108	119	16,5	54	85	78	72	1/2"
125	65	145	380	60	60	53	77	138	131	19,5	66	97	81	78	3/4"
125	80	145	380	60	60	53	77	138	131	19,5	66	97	81	78	3/4"
125	100	145	380	60	60	53	77	138	131	19,5	66	97	81	78	3/4"
140	70	160	425	70	65	60	85	148	147	19,5	74	103	93	93	3/4"
140	90	160	425	70	65	60	85	148	147	19,5	74	103	93	93	3/4"
160	80	185	470	80	70	65	98	172	145	24,5	85	100	127	101	1"
160	100	185	470	80	70	65	98	172	145	24,5	85	100	127	101	1"
180	90	205	520	90	80	70	105	192	170	24,5	95	115	135	95	1"
180	110	205	520	90	80	70	105	192	170	24,5	95	115	135	95	1"
200	100	230	570	100	90	80	118	218	173	38,5	110	120	155	106	1 1/4"
200	125	230	570	100	90	80	118	218	173	38,5	110	120	155	106	1 1/4"
220	125	254	<h2>Contact Fjero for solutions</h2>												
220	140	254													
250	125	298,5													
250	140	298,5													
250	160	298,5													
280	140	323,9													
280	160	323,9													
280	180	323,9													
300	160	356													
300	180	356													